


AW - AUTOTRANSFORMERS FOR FAN SPEED CONTROL

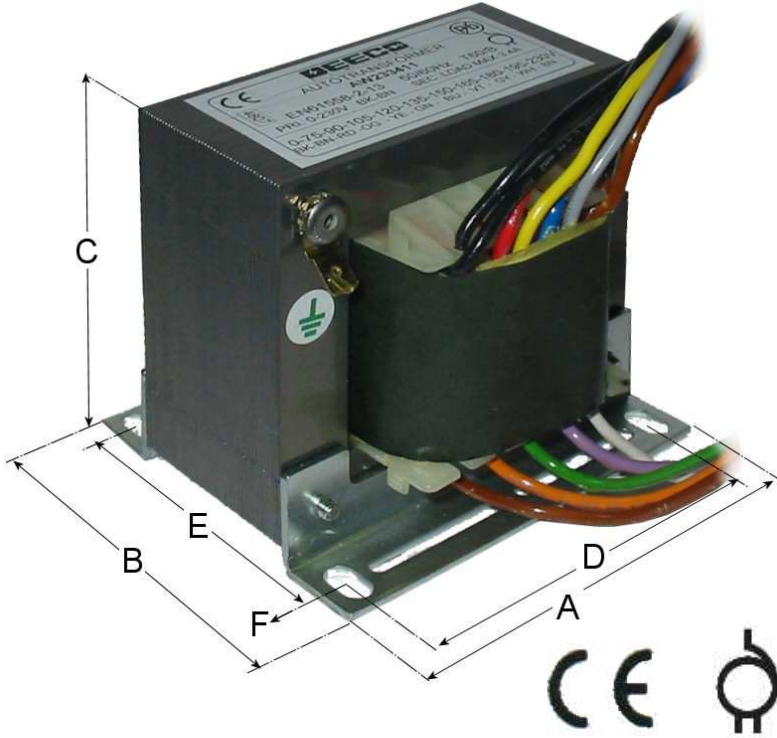

- EN61558-2-13
- Voltages : See table below, 50/60Hz
- Safety Class 1, IP00
- Termination : Via Coloured Wires
- Min. 2Kv flash tested to core (Earth)
- Dip impregnation,
- Ambient temperature 40°C Max.
- Insulation class B
- Mounting brackets to DIN 41307,
- Nylon bushes fitted for lower core-loss and higher efficiency.

| PART NO | VOLTAGE TAPPINGS | AMPS | A | B | C | D | E | F | KG | COLOURS |
|----------|--|------|-----|-----|-----|-----|-----|-----------|-----|-----------------------------|
| AW230804 | 0-90-130-230V | 0.8 | 66 | 53 | 60 | 50 | 40 | 8.8 X 4.6 | 0.7 | Bk-Br-R-O |
| AW230811 | 0-75-90-105-120-135-150-165-180-195-230V | 0.8 | 66 | 66 | 60 | 50 | 52 | 8.8 X 4.6 | 1.1 | Bk-Br-R-O-Y-Gn-Bu-V-Gy-W-Br |
| AW232204 | 0-90-130-230V | 2.2 | 84 | 75 | 74 | 64 | 62 | 9 X 4.8 | 2.1 | Bk-Br-R-O |
| AW232211 | 0-75-90-105-120-135-150-165-180-195-230V | 2.2 | 84 | 75 | 74 | 64 | 62 | 9 X 4.8 | 2.1 | Bk-Br-R-O-Y-Gn-Bu-V-Gy-W-Br |
| AW233404 | 0-90-130-230V | 3.4 | 96 | 87 | 87 | 84 | 71 | 11 X 5.8 | 2.8 | Bk-Br-R-O |
| AW233411 | 0-75-90-105-120-135-150-165-180-195-230V | 3.4 | 96 | 87 | 87 | 84 | 71 | 11 X 5.8 | 2.8 | Bk-Br-R-O-Y-Gn-Bu-V-Gy-W-Br |
| AW235204 | 0-90-130-230V | 5.2 | 120 | 87 | 105 | 90 | 70 | 11 X 5.8 | 4.1 | Bk-Br-R-O |
| AW235211 | 0-75-90-105-120-135-150-165-180-195-230V | 5.2 | 120 | 87 | 105 | 90 | 70 | 11 X 5.8 | 4.1 | Bk-Br-R-O-Y-Gn-Bu-V-Gy-W-Br |
| AW237511 | 0-75-90-105-120-135-150-165-180-195-230V | 7.5 | 120 | 102 | 105 | 90 | 86 | 11 X 5.8 | 5.4 | Bk-Br-R-O-Y-Gn-Bu-V-Gy-W-Br |
| AW239911 | 0-75-90-105-120-135-150-165-180-195-230V | 13.6 | 150 | 131 | 132 | 122 | 105 | 13 X 7 | 10 | Bk-Br-R-O-Y-Gn-Bu-V-Gy-W-Br |
| AW401406 | 0-90-120-160-220-400V | 1.4 | 96 | 87 | 87 | 84 | 71 | 11 X 5.8 | 2.8 | Bk-Gy-W-O-R-Br |
| AW401409 | 0-90-120-140-160-190-220-250-400V | 1.4 | 96 | 87 | 87 | 84 | 71 | 11 X 5.8 | 2.8 | Bk-R-Y-Gn-V-W-O-Gy-Br |
| AW402006 | 0-90-120-160-220-400V | 2 | 96 | 101 | 87 | 84 | 85 | 11 X 5.8 | 3.6 | Bk-Gy-W-O-R-Br |
| AW402009 | 0-90-120-140-160-190-220-250-400V | 2 | 96 | 101 | 87 | 84 | 85 | 11 X 5.8 | 3.6 | Bk-R-Y-Gn-V-W-O-Gy-Br |
| AW404006 | 0-90-120-160-220-400V | 4 | 120 | 102 | 105 | 90 | 86 | 11 X 5.8 | 5.4 | Bk-Gy-W-O-R-Br |
| AW404009 | 0-90-120-140-160-190-220-250-400V | 4 | 120 | 102 | 105 | 90 | 86 | 11 X 5.8 | 5.4 | Bk-R-Y-Gn-V-W-O-Gy-Br |
| AW407006 | 0-90-120-160-220-400V | 7 | 150 | 131 | 132 | 122 | 105 | 13 X 7 | 10 | Bk-Gy-W-O-R-Br |
| AW407009 | 0-90-120-140-160-190-220-250-400V | 7 | 150 | 131 | 132 | 122 | 105 | 13 X 7 | 10 | Bk-R-Y-Gn-V-W-O-Gy-Br |

N.B....Dimensions and weights are approximate and are subject to change.

OPTIONS :

- Other ratings and voltages can be supplied on request.
- Screw or solder terminals.