


CPK CONTROL TRANSFORMERS

Control transformers designed and manufactured in accordance with
EN61558-2-2 (BS3535,VDE 0550/0551).

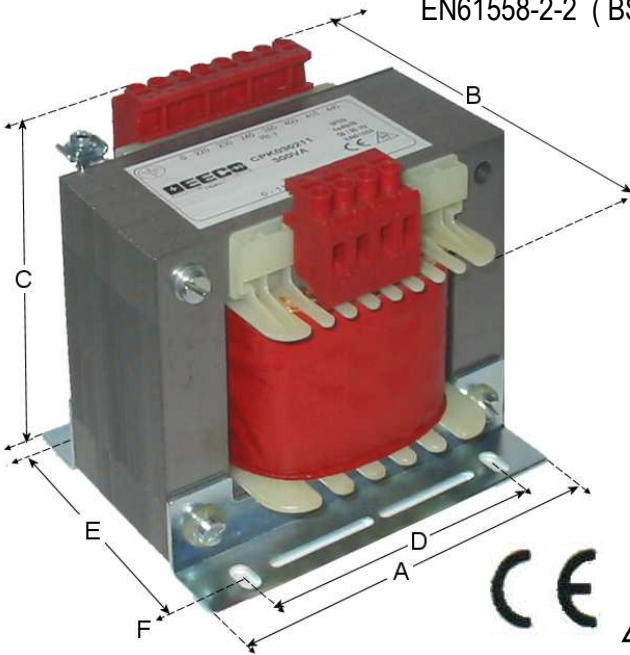

- Multi-tapped standard input voltages...
220 / 230 / 240 / 380 / 400 / 415 / 440V,
50/60Hz.
- Standard output voltages, See table below
- Safety Class 1,
- IP00, Screw terminals to IP20 (Cable Cage)
- Minimum 3KV flash tested,
- Dip impregnation,
- Ambient temperature 40°C max.
- Insulation class B
- Mounting brackets to DIN 41307,
- Nylon bushes fitted for lower core-loss and
higher efficiency.

VA	PART NO	OUTPUT VOLTS	DIMENSIONS IN MM						WEIGHT KGS
			A	B	C	D	E	F	
50	CPK 005212	0 - 12 , 0 - 12 (24)	75	78	83	56	53	4.5 x 9	1.25
	CPK 005224	0 - 24 , 0 - 24 (48)							
	CPK 005255	55 - 0 - 55 (110)							
	CPK 005211	0 - 115 , 0 - 115 (230)							
63	CPK 006 XXX	AS ABOVE	84	68	93	64	48	4.5 x 9	1.50
100	CPK 010 XXX	"	84	84	93	64	63	"	2.10
150	CPK 015 XXX	"	96	98	112	84	73	5.5 x 11	2.80
200	CPK 020 XXX	"	96	112	112	84	87	5.5 x 11	3.65
300	CPK 030 XXX	"	120	97	120	90	80	"	5.00
500	CPK 050 XXX	"	120	117	120	90	100	"	6.35
750	CPK 075 XXX	"	150	143	152	122	107	7 x 13	10.40
1000	CPK 100 XXX	"	150	163	152	122	127	7 x 13	13.50
-	-	-	-	-	-	-	-	-	-
1500	CPK 150 255	55 - 0 - 55 (110)	192	140	175	128 / 161	98	6.8	15.50
	CPK 150 211	115 - 0 - 115 (230)	"	"	"	"	"	"	"
2000	CPK 200 XXX	AS ABOVE	192	156	175	128 / 161	112	6.8	20.00
3000	CPK 300 XXX	"	192	182	189	128 / 161	132	6.8	26.50
4000	CPK 400 XXX	"	255	185	235	170 / 210	120	8.0	33.50
5000	CPK 500 XXX	"	255	225	235	170 / 210	160	8.0	43.80

N.B....Dimensions and weights are approximate and may be changed without prior notice.

OPTIONS :

- Fuse / Thermal protection
- Screwless terminals (Spring cage)
- 35mm DIN rail Mounting (TS35)

Other ratings and voltages can be supplied on request.