


**DT-2M / DT-3M BELL TRANSFORMERS**



DT-3M

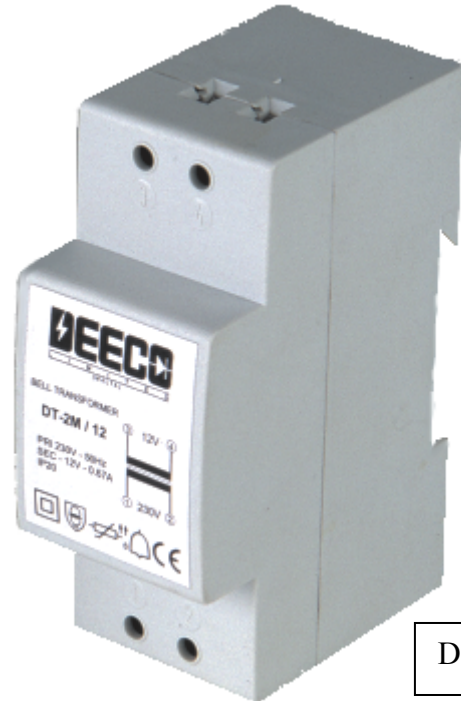

DT-2M




A range of 35mm. TS35, DIN rail mounting short-circuit proof safety isolating transformers, in 2-module and 3-module widths, to EN 61558-2-8. These transformers are designed mainly for intermittent loading such as bells, chimes or door solenoids.

Standard input voltage 230V 50/60 Hz.

Short-circuit and overload protection by means of PTC in series with primary winding.

IP 20, Class II.

TYPE	OUTPUT	DIMENSIONS ( mm. )					WEIGHT ( Kgs. )
		A	B	C	D	E	
DT-2M / 8	8V - 1A	90	36	63	58	45	0.30
DT-2M / 12	12V - 0.67A	90	36	63	58	45	0.30
DT-3M / 4-8-12	4 / 8 / 12V - 2A	90	54	63	58	45	0.65
DT-3M / 8-12-24	8 / 12 / 24V - 1A	90	54	63	58	45	0.65
DT-3M / 12-0-12	12 / 12 / 24V - 1A	90	54	63	58	45	0.65

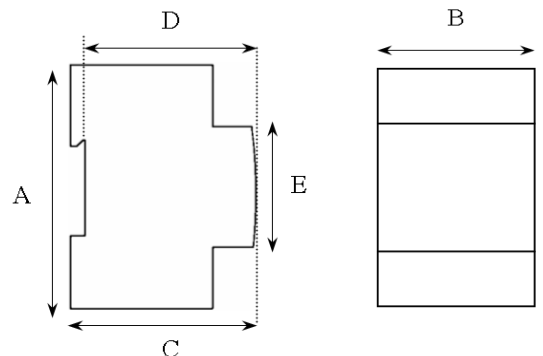

Other ratings and voltages available on request.