


## PBI CHASSIS MOUNTING TRANSFORMERS

A range of chassis mounting safety isolating transformers with double section bobbin construction offering very good isolation properties between primary and secondary windings. To EN61558-2-6, fully shrouded windings, 4KV flash tested, Dual Primary 2 x 115V (230V) 50/60Hz, IP00.

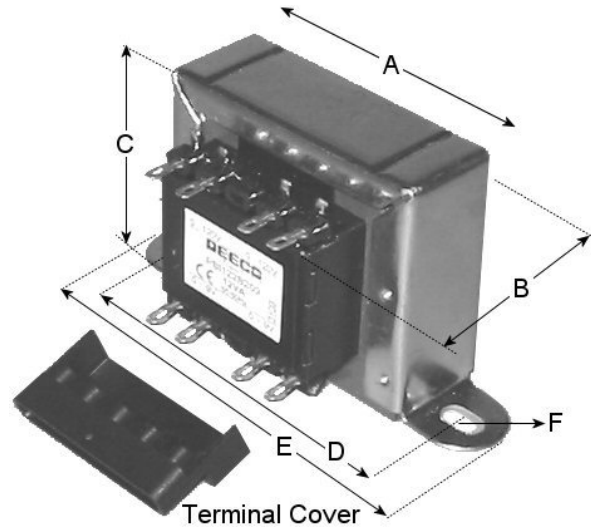

REF	VA	OUTPUT Volts	OUTPUT Amps	A	B	C	D	E	F	kg
PBI062B206	6	2 X 6V (12V)	2 X 0.50	45.5	35	37.5	55	68	6 X 3.8	0.18
PBI062B209		2 X 9V ( 18V)	2 X 0.33							
PBI062B212		2 X 12V (24V)	2 X 0.25							
PBI062B215		2 X 15V (30V)	2 X 0.20							
PBI062B218		2 X 18V (36V)	2 X 0.17							
PBI062B220		2 X 20V (40V)	2 X 0.15							
PBI062B224	2 X 24V (48V)	2 X 0.13								
PBI122B206	12	2 X 6V (12V)	2 X 1	60	46	50	74	90	8.5 X 4.7	0.38
PBI122B209		2 X 9V ( 18V)	2 X 0.67							
PBI122B212		2 X 12V (24V)	2 X 0.5							
PBI122B215		2 X 15V (30V)	2 X 0.4							
PBI122B218		2 X 18V (36V)	2 X 0.33							
PBI122B220		2 X 20V (40V)	2 X 0.30							
PBI122B224	2 X 24V (48V)	2 X 0.25								
PBI202B206	20	2 X 6V (12V)	2 X 1.67	60	50	50	74	90	8.5 X 4.7	0.53
PBI202B209		2 X 9V ( 18V)	2 X 1.11							
PBI202B212		2 X 12V (24V)	2 X 0.83							
PBI202B215		2 X 15V (30V)	2 X 0.66							
PBI202B218		2 X 18V (36V)	2 X 0.55							
PBI202B220		2 X 20V (40V)	2 X 0.5							
PBI202B224	2 X 24V (48V)	2 X 0.42								
PBI252B206	25	2 X 6V (12V)	2 X 2.08	70	52	58	84	98	8.5 X 4.7	0.67
PBI252B209		2 X 9V ( 18V)	2 X 1.39							
PBI252B212		2 X 12V (24V)	2 X 1.04							
PBI252B215		2 X 15V (30V)	2 X 0.83							
PBI252B218		2 X 18V (36V)	2 X 0.69							
PBI252B220		2 X 20V (40V)	2 X 0.63							
PBI252B224	2 X 24V (48V)	2 X 0.52								
PBI502B206	50	2 X 6V (12V)	2 X 4.17	79	59	66	92	106	8.4 X 4.7	1
PBI502B209		2 X 9V ( 18V)	2 X 2.78							
PBI502B212		2 X 12V (24V)	2 X 2.08							
PBI502B215		2 X 15V (30V)	2 X 1.67							
PBI502B218		2 X 18V (36V)	2 X 1.39							
PBI502B220		2 X 20V (40V)	2 X 1.25							
PBI502B224	2 X 24V (48V)	2 X 1.04								

N.B....Dimensions and weights are approximate.

To EN61558-2-6 ( safety isolating ) except PBI062B220, and those with 2 x 24V outputs these are to EN61558-2-4 ( isolating ).

### OPTIONS :

- Individual packing,
- Terminal Covers,
- Short circuit / overload protection,
- Different terminals / Flying leads,
- Other ratings and voltages can be supplied on request.